

# NON-CHLORINATED ELECTRICAL CLEANER



## EL™ 2846



For use on Energized Equipment

NSF

K2

NSF® Registered; K2 Rated (Solvents for cleaning electronic instruments) (Registration# 138487)



Dielectric strength value: 15,000 volts

NON  
FLAM

Non-flammable

VERY  
FAST  
EVAP

Evaporation rate: Very Fast

KB

129

KB Solvency Strength (higher value, stronger the solvent): 129

H 2  
F 0  
R 0

HMIS Hazard Rating  
Health (2) • Flammability (0) • Reactivity (0)

- Non-flammable, non-chlorinated
- Fast evaporating
- Dielectric strength: 15,000 volts
- No hazardous air pollutants



PRESERVE. PROTECT. PREVENT.™

Sprayon® EL™2846 Non-Chlorinated Electrical Degreaser is a non-flammable, fast-evaporating cleaner that penetrates instantly to remove dirt, oil, grease and wax. Increases the life of electrical components by removing foreign materials that can cause costly downtime. Degreases more thoroughly and several times faster than alkaline cleaners. Excellent for cleaning sheet and strip steel prior to galvanizing. Equipped with a high-delivery valve for cleaning efficiency and an extension tube for hard-to-reach areas.

## ELECTRICAL & ELECTRONIC

### USES

- Electric motors
- Generators
- Air tools
- Brakes
- Clutches
- Chains
- Sprockets
- Wire rope
- Dies
- Molds
- Relays
- Locks
- Radar equipment
- Material handling equipment
- Air conditioners



EL2846

© 2010 Sprayon® Products Made in U.S.A.

### APPLICATION

Product should be sprayed in a well-ventilated area. Shake well before using. Sprays best at room temperature (70°F). Hold can in upright position for best spray pattern. NOTE: May harm certain plastics, elastomers and air-dry painted surfaces. Test product on nonessential similar material prior to application.

### PERFORMANCE

**EVAPORATION RATE:** Very Fast  
**KB VALUE (Cleaning Power):** 129  
**DIELECTRIC STRENGTH:** 15,000 volts  
**PLASTIC SAFE:** No

- NSF Registration Number 138487; K2 Rated
- Non-chlorinated
- Non-ozone depleting
- No residue
- High delivery valve
- Fast evaporation
- Safe on all ferrous and non-ferrous metals
- Safe on lexan, ABS and noryl plastics
- Equipped with an extension tube for hard to reach areas

### PACKAGING

**STOCK #:** S02084600  
**UPC CODE:** 0-75577-20846-3  
**FILL WT:** 18 oz.  
**PER CASE:** 12  
**CARTON DIMENSIONS:**  
L 11.13" x W 8.44" x H 9.94"

### SHIPPING


Refer to section 14 of the material safety data sheet for proper transport information and labeling.

### PROPERTIES

**APPEARANCE:** Clear Volatile Liquid  
**ODOR:** Strong  
**PROPELLANT:** CO<sub>2</sub>  
**WT./GAL.:** 10.74  
**SPECIFIC GRAVITY:** 1.29  
**H.A.P.S. (HAZARDOUS AIR POLLUTANTS):** No  
**SARA 313 CHEMICALS:** No  
**PROP 65 CHEMICALS:** No  
**% VOC AEROSOL:** 94%  
**V.O.C. COMPLIANT CALIFORNIA:** Yes  
**V.O.C. COMPLIANT OTC STATES:** Yes  
**FLAMMABLE:** No  
**FLASH POINT:** N/A  
**HAZARD RATING:** 2, 0, 0  
**SHELF LIFE:** 3 years from date of manufacture

### RESOURCES

**MSDS/EDS/PRODUCT DATA SHEETS:** [sprayon.com](http://sprayon.com)  
**CUSTOMER SERVICE:** 1-800-777-2966  
**TECHNICAL INFORMATION:** 1-800-251-2486

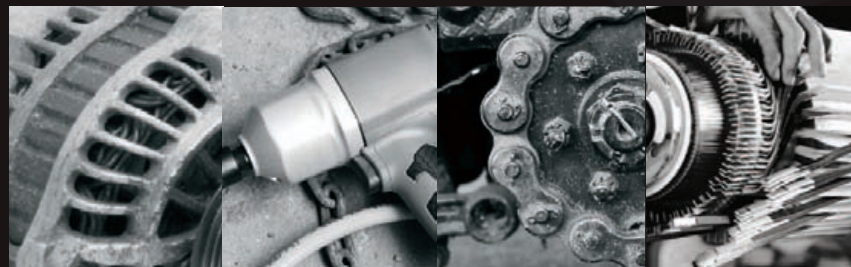

Distributed by:

**Lawson Products, Inc.**

To order these and other products, contact us:

866-529-7664 [lawsonproducts.com](http://lawsonproducts.com)

PRESERVE. PROTECT. PREVENT.



**Sprayon® Products**

101 Prospect Ave. NW  
Cleveland, OH 44115  
[Sprayon.com](http://Sprayon.com)  
1-800-777-2966

310-PDS-EL2846