




HOSE – Steel Braided



Kurt 100R16S High Pressure Hydraulic Hose Double Braid

- **Agency Ratings:** SAE 100R16S
- **Fittings Certified:** Kurt braided hose fittings
- **Agency Approval:** MSHA
- **Construction:**
 - Inner Tube: Synthetic rubber
 - Reinforcement: Two high tensile steel wire braid
 - Cover: Abrasion-, ozone- and weather-resistant synthetic rubber
- **Operating Temperature Range:** -40°F to +212°F (-40°C to +100°C)



- **Application Notes:** Recommended for low and medium pressure hydraulic oil lines

I.D. (Inches)	Hose O.D. (Inches)	Working Pressure (PSI)	Burst Pressure (PSI)	Bend Radius (Inches)	Item No.	Pkg. Qty.
1/4 (-4)	0.54	5,750	23,000	2	1562968	50 Ft.
	0.54	5,750	23,000	2	1562965	250 Ft.
3/8 (-6)	0.67	4,750	19,000	2.5	1562967	50 Ft.
	0.67	4,750	19,000	2.5	1562963	250 Ft.
1/2 (-8)	0.81	4,000	16,000	3.5	1562975	50 Ft.
	0.81	4,000	16,000	3.5	1562971	250 Ft.
5/8 (-10)	0.94	3,500	14,000	4	1562955	50 Ft.
	0.94	3,500	14,000	4	1562966	220 Ft.
3/4 (-12)	1.09	3,000	12,000	4.5	1562949	50 Ft.
	1.09	3,000	12,000	4.5	1562972	220 Ft.
1 (-16)	1.39	2,250	9,000	6	1562973	50 Ft.
	1.39	2,250	9,000	6	1562953	165 Ft.



Kurt 100R2S High Pressure Hydraulic Hose Double Braid

- **Agency Ratings:** SAE 100R2S, EN 853 2SN
- **Fittings Certified:** Kurt braided hose fittings
- **Agency Approval:** MSHA
- **Construction:**
 - Inner Tube: Synthetic rubber
 - Reinforcement: Two high tensile steel wire braids
 - Cover: Abrasion-, ozone- and weather-resistant synthetic rubber
- **Operating Temperature Range:** -40°F to +212°F (-40°C to +100°C)



- **Application Notes:** Recommended for low and medium pressure hydraulic oil lines

I.D. (Inches)	Hose O.D. (Inches)	Working Pressure (PSI)	Burst Pressure (PSI)	Bend Radius (Inches)	Item No.	Pkg. Qty.
1/4 (-4)	0.59	5,750	23,000	4	1562974	50 Ft.
	0.59	5,750	23,000	4	1562969	250 Ft.
3/8 (-6)	0.75	4,750	19,000	5	1562964	50 Ft.
	0.75	4,750	19,000	5	1562970	250 Ft.
1/2 (-8)	0.87	4,000	16,000	7	1562950	50 Ft.
	0.87	4,000	16,000	7	1562956	250 Ft.
5/8 (-10)	1	3,500	14,000	8	1562960	50 Ft.
	1	3,500	14,000	8	1562954	220 Ft.
3/4 (-12)	1.15	3,000	12,000	9.5	1562959	50 Ft.
	1.15	3,000	12,000	9.5	1562951	220 Ft.
1 (-16)	1.5	2,250	9,000	12	1562962	50 Ft.
	1.5	2,250	9,000	12	1562952	165 Ft.
1-1/4 (-20)	1.84	1,750	7,000	16.5	1562957	131 Ft.
1-1/2 (-24)	2.15	1,300	5,200	19.5	1562961	131 Ft.
2 (-32)	2.63	1,250	5,000	24.5	1562958	131 Ft.




KURT BRAIDED HOSE FITTINGS



These fittings are designed for crimping Kurt 100R2S and 100R16S hoses




SAE 37° (JIC) Female Swivel Hose I.D. x Female JIC




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	88357KH	5
	1/2-20 (-5)	88358KH	5
	9/16-18 (-6)	88359KH	5
3/8 (-6)	7/16-20 (-4)	63304KH	5
	9/16-18 (-6)	88360KH	5
	3/4-16 (-8)	88361KH	5
	7/8-14 (-10)	88362KH	5
1/2 (-8)	1-1/16-12 (-12)	88363KH	5
	9/16-18 (-6)	63305KH	5
	3/4-16 (-8)	88364KH	5
	7/8-14 (-10)	88365KH	2
5/8 (-10)	1-1/16-12 (-12)	88366KH	2
	1-5/16-12 (-16)	88367KH	2
	3/4-16 (-8)	88368KH	2
	7/8-14 (-10)	88369KH	2
3/4 (-12)	1-1/16-12 (-12)	88370KH	2
	7/8-14 (-10)	88371KH	2
	1-1/16-12 (-12)	88372KH	2
	1-3/16-12 (-14)	88373KH	2
1 (-16)	1-5/16-12 (-16)	88374KH	2
	1-1/16-12 (-12)	63306KH	1
	1-3/16-12 (-14)	88375KH	1
	1-5/16-12 (-16)	88376KH	1
1-1/4 (-20)	1-5/8-12 (-20)	63307KH	1
	1-5/8-12 (-20)	88377KH	1

SAE 37° (JIC) Female Swivel – 90° Tube Elbow Hose I.D. x Female JIC




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	88378KH	2
	1/2-20 (-5)	88379KH	2
	9/16-18 (-6)	63375KH	2
3/8 (-6)	9/16-18 (-6)	88380KH	2
	3/4-16 (-8)	88381KH	2
1/2 (-8)	3/4-16 (-8)	88382KH	1
	7/8-14 (-10)	88383KH	1
5/8 (-10)	7/8-14 (-10)	63376KH	1
	1-1/16-12 (-12)	63378KH	1
3/4 (-12)	7/8-14 (-10)	88384KH	1
	1-1/16-12 (-12)	88385KH	1
1 (-16)	1-5/16-12 (-16)	88386KH	1
	1-1/4 (-20)	1-5/8-12 (-20)	63377KH

SAE 37° (JIC) Female Swivel – 90° Long Drop Tube Elbow Hose I.D. x Female JIC



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	63379KH	2
3/8 (-6)	9/16-18 (-6)	63380KH	2
1/2 (-8)	3/4-16 (-8)	63381KH	2
	7/8-14 (-10)	63382KH	1
3/4 (-12)	1-1/16-12 (-12)	63383KH	1
1 (-16)	1-5/16-12 (-16)	63384KH	1

SAE 37° (JIC) Female Swivel – 90° Block Elbow Hose I.D. x Female JIC



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	88351KH	2
3/8 (-6)	9/16-18 (-6)	88352KH	2
1/2 (-8)	3/4-16 (-8)	88353KH	2
	7/8-14 (-10)	88354KH	2
3/4 (-12)	7/8-14 (-10)	88355KH	1
	1-1/16-12 (-12)	63409KH	1




KURT BRAIDED HOSE FITTINGS



These fittings are designed for crimping Kurt 100R2S and 100R16S hoses




SAE 37° (JIC) Female Swivel – 45° Tube Elbow Hose I.D. x Female JIC




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	88387KH	2
	1/2-20 (-5)	88388KH	2
3/8 (-6)	9/16-18 (-6)	88389KH	2
	3/4-16 (-8)	88390KH	2
1/2 (-8)	3/4-16 (-8)	88391KH	2
	7/8-14 (-10)	88392KH	2
5/8 (-10)	1-1/16-12 (-12)	63358KH	1
3/4 (-12)	1-1/16-12 (-12)	88393KH	1
1 (-16)	1-5/16-12 (-16)	88394KH	1

Female Flat Face O-Ring Hose I.D. x Female FFOR




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	9/16-18 (-4)	51140KH	2
	11/16-16 (-6)	63336KH	2
3/8 (-6)	9/16-18 (-4)	63338KH	2
	11/16-16 (-6)	51141KH	2
1/2 (-8)	13/16-16 (-8)	63339KH	2
	11/16-16 (-6)	63340KH	2
5/8 (-10)	13/16-16 (-8)	51142KH	2
	1-14 (-10)	63341KH	2
3/4 (-12)	1-3/16-12 (-12)	63342KH	1
	1-14 (-10)	51143KH	2
1 (-16)	1-3/16-12 (-12)	63343KH	1
	1-14 (-10)	63344KH	1
1-1/4 (-20)	1-3/16-12 (-12)	51144KH	1
	1-7/16-12 (-16)	63345KH	1
1-1/2 (-24)	1-7/16-12 (-16)	51145KH	1
	1-11/16-12 (-20)	63347KH	1
1-3/4 (-30)	1-11/16-12 (-20)	63348KH	1

Female Swivel Flat Face O-Ring – 90° Short Elbow Hose I.D. x Female FFOR




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	9/16-18 (-4)	51152KH	2
	11/16-16 (-6)	63388KH	2
3/8 (-6)	9/16-16 (-4)	63389KH	2
	11/16-16 (-6)	51153KH	2
1/2 (-8)	13/16-16 (-8)	63390KH	2
	11/16-16 (-6)	63391KH	2
5/8 (-10)	13/16-16 (-8)	51154KH	2
	1-14 (-10)	63392KH	1
3/4 (-12)	1-3/16-12 (-12)	63393KH	1
	1-14 (-10)	51155KH	1
1 (-16)	1-3/16-12 (-12)	63394KH	1
	1-3/16-12 (-12)	51156KH	1
1-1/4 (-20)	1-7/16-12 (-16)	63396KH	1
	1-7/16-12 (-16)	51157KH	1

Female Swivel Flat Face O-Ring – 90° Medium Elbow Hose I.D. x Female FFOR




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	9/16-18 (-4)	51164KH	2
3/8 (-6)	11/16-16 (-6)	51165KH	2
1/2 (-8)	13/16-16 (-8)	51166KH	2
5/8 (-10)	1-14 (-10)	63402KH	1
3/4 (-12)	1-3/16-12 (-12)	63403KH	1
1 (-16)	1-7/16-12 (-16)	51169KH	1

Female Swivel Flat Face O-Ring – 90° Long Elbow Hose I.D. x Female FFOR



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	9/16-18 (-4)	51158KH	2
3/8 (-6)	11/16-16 (-6)	51159KH	2
	13/16-16 (-8)	63406KH	2
1/2 (-8)	13/16-16 (-8)	51160KH	2
	1-14 (-10)	63407KH	1
5/8 (-10)	1-14 (-10)	51161KH	1
3/4 (-12)	1-3/16-12 (-12)	51162KH	1

Female Swivel Flat Face O-Ring – 45° Elbow Hose I.D. x Female FFOR



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	9/16-18 (-4)	51146KH	2
	11/16-16 (-6)	63359KH	2
3/8 (-6)	11/16-16 (-6)	51147KH	2
	13/16-16 (-8)	63361KH	2
1/2 (-8)	11/16-16 (-6)	63360KH	2
	13/16-16 (-8)	51148KH	2
5/8 (-10)	1-14 (-10)	63362KH	1
	1-14 (-10)	51149KH	1
3/4 (-12)	1-3/16-12 (-12)	63363KH	1
	1-14 (-10)	63364KH	1
1 (-16)	1-3/16-12 (-12)	51150KH	1
	1-7/16-12 (-16)	63365KH	1
1-1/4 (-20)	1-7/16-12 (-16)	51151KH	1




KURT BRAIDED HOSE FITTINGS



These fittings are designed for crimping Kurt 100R2S and 100R16S hoses




Female Pipe Rigid Hose I.D. x Female NPT




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	1/8-27 (-2)	88325KH	2
	1/4-18 (-4)	88326KH	2
	1/4-18 (-4)	63302KH	2
3/8 (-6)	3/8-18 (-6)	88327KH	2
1/2 (-8)	1/2-14 (-8)	88328KH	1
3/4 (-12)	3/4-14 (-12)	88329KH	1

Female Pipe Swivel (NPSM) Hose I.D. x Female NPSM



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	1/4-18 (-4)	88302KH	2
3/8 (-6)	3/8-18 (-6)	88303KH	2
1/2 (-8)	1/2-14 (-8)	88304KH	1
3/4 (-12)	3/4-14 (-12)	88305KH	1
1 (-16)	1-11-1/2 (-16)	88306KH	1


Female BSPP Swivel 60° Flare Hose I.D. x Female BSPP



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	G-1/4-19 (-4)	51125KH	2
	G-3/8-19 (-6)	63326KH	2
	G-3/8-19 (-6)	51126KH	2
3/8 (-6)	G-1/2-14 (-8)	63327KH	2
	G-1/2-14 (-8)	51127KH	2
1/2 (-8)	G-5/8-14 (-10)	63328KH	2
	G-5/8-14 (-10)	63329KH	2
5/8 (-10)	G-3/4-14 (-12)	51128KH	2
3/4 (-12)	G-1-11 (-16)	51129KH	2

G as part of thread size is ISO designation for parallel thread


Female BSPP Swivel 60° Flare – 90° Elbow Hose I.D. x Female BSPP



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	G-1/4-19 (-4)	51130KH	2
	G-3/8-19 (-6)	51131KH	2
3/8 (-6)	G-1/2-14 (-8)	63385KH	2
1/2 (-8)	G-1/2-14 (-8)	51132KH	2
3/4 (-12)	G-3/4-14 (-12)	51133KH	1

G as part of thread size is ISO designation for parallel thread


Female BSPP Swivel 60° Flare – 45° Elbow Hose I.D. x Female BSPP



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	G-1/4-19 (-4)	22944KH	5
3/8 (-6)	G-3/8-19 (-6)	22945KH	2


G as part of thread size is ISO designation for parallel thread

Female Swivel – SAE 45° Hose I.D. x Female SAE 45°




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
3/8 (-6)	5/8-18 (-6)	88423KH	5
3/4 (-12)	1-1/16-14 (-12)	88424KH	2

Female Swivel – SAE 45° – 90° Tube Elbow Hose I.D. x Female SAE 45°



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
3/8 (-6)	5/8-18 (-10)	88427KH	5
	7/16-20 (-4)	88426KH	5

Female Swivel – SAE 45° – 45° Tube Elbow Hose I.D. x Female SAE 45°



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
3/8 (-6)	5/8-18 (-6)	88429KH	2




KURT BRAIDED HOSE FITTINGS



These fittings are designed for crimping Kurt 100R2S and 100R16S hoses




Female Swivel DIN Universal Seat (Light) (DIN 3902) Hose I.D. x Female DIN




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	M12 x 1.5	63308KH	2
	M14 x 1.5	63309KH	2
	M16 x 1.5	63310KH	2
3/8 (-6)	M16 x 1.5	63311KH	2
	M18 x 1.5	63312KH	1
1/2 (-8)	M22 x 1.5	63313KH	1
5/8 (-10)	M26 x 1.5	63314KH	1
3/4 (-12)	M30 x 2.0	63315KH	1

Female Swivel DIN Universal Seat (Light) 90° Elbow Hose I.D. x Female DIN



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	M14 x 1.5	22954KH	5
	M16 x 1.5	22955KH	5
	M16 x 1.5	22956KH	2
3/8 (-6)	M16 x 1.5	22957KH	2
	M18 x 1.5	22958KH	2


Female JIS 30° Flare Parallel Pipe Swivel Hose I.D. x Female JIS



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	G-1/4-19 (-4)	63330KH	2
3/8 (-6)	G-3/8-19 (-6)	63331KH	2
1/2 (-8)	G-1/2-14 (-8)	63332KH	1
3/4 (-12)	G-3/4-14 (-12)	63334KH	1


G as part of thread size is ISO designation for parallel thread

Female Swivel 30° Flare Metric Hose I.D. x Female Flare




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	M14 x 1.5	51119KH	2
3/8 (-6)	M18 x 1.5	51120KH	2
1/2 (-8)	M22 x 1.5	51121KH	2

Female Grease Tap Hose I.D. x Female Grease Tap



Fitting Dimension A (Hose) (Inches)	Item No.	Pkg. Qty.
1/4 (-4)	88266KH	2


Male Flat Face O-Ring Hose I.D. x Male FFOR



Does not include O-ring

Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	9/16-18 (-4)	51134KH	2
	11/16-16 (-6)	51135KH	2
3/8 (-6)	13/16-16 (-8)	63290KH	2
	13/16-16 (-8)	51136KH	2
1/2 (-8)	1-14 (-10)	17408KH	2
	1-3/16-12 (-12)	63291KH	1
5/8 (-10)	1-14 (-10)	51137KH	1
	1-3/16-12 (-12)	17409KH	1
3/4 (-12)	1-3/16-12 (-12)	51138KH	1
	1-7/16-12 (-16)	63292KH	1
1 (-16)	1-7/16-12 (-16)	51139KH	1

SAE 37° (JIC) Male Rigid Hose I.D. x Male JIC



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	88334KH	5
	1/2-20 (-5)	88335KH	5
	9/16-18 (-6)	88336KH	5
3/8 (-6)	9/16-18 (-6)	88337KH	5
	3/4-16 (-8)	88338KH	5
	7/8-14 (-10)	88339KH	5
1/2 (-8)	3/4-16 (-8)	88340KH	2
	7/8-14 (-10)	88341KH	2
	1-1/16-12 (-12)	88342KH	2
5/8 (-10)	3/4-16 (-8)	63294KH	2
	7/8-14 (-10)	63295KH	2
	1-1/16-12 (-12)	88343KH	2
3/4 (-12)	7/8-14 (-10)	88344KH	2
	1-1/16-12 (-12)	88345KH	2
	1-3/16-12 (-14)	88346KH	2
1 (-16)	1-5/16-12 (-16)	88347KH	2
	1-3/16-12 (-14)	88348KH	1
	1-5/16-12 (-16)	88349KH	1
1-1/4 (-20)	1-5/8-12 (-20)	88350KH	1




KURT BRAIDED HOSE FITTINGS



These fittings are designed for crimping Kurt 100R2S and 100R16S hoses




Male Pipe Rigid Hose I.D. x Male NPT



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	1/8-27 (-2)	88307KH	5
	1/4-18 (-4)	88308KH	5
	3/8-18 (-6)	88309KH	5
3/8 (-6)	1/2-14 (-8)	63288KH	5
	1/4-18 (-4)	88310KH	5
	3/8-18 (-6)	88311KH	5
1/2 (-8)	1/2-14 (-8)	88312KH	5
	1/4-18 (-4)	63289KH	5
	3/8-18 (-6)	88313KH	5
	1/2-14 (-8)	88314KH	5
5/8 (-10)	3/4-14 (-12)	88315KH	2
	1/2-14 (-8)	88317KH	2
	3/4-14 (-12)	88318KH	2
3/4 (-12)	1/2-14 (-8)	88319KH	2
	3/4-14 (-12)	88320KH	2
	1-11-1/2 (-16)	88321KH	2
1 (-16)	3/4-14 (-12)	88322KH	1
	1-11-1/2 (-16)	88323KH	1
1-1/4 (-20)	1-1/4-11-1/2 (-20)	88324KH	1


Male Pipe Rigid – BSPP Hose I.D. x Male BSPP



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	G-1/4-19 (-4)	51114KH	2
3/8 (-6)	G-3/8-19 (-6)	51115KH	2
	G-1/2-14 (-8)	22875KH	2
1/2 (-8)	G-3/8-19 (-6)	22876KH	2
	G-1/2-14 (-8)	51116KH	2
3/4 (-12)	G-3/4-14 (-12)	51117KH	2


G as part of thread size (Fitting Dimension B) is ISO designation for parallel thread.

Male Pipe Swivel Hose I.D. x Male NPT



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	1/4-18 (-4)	88267KH	5
	1/4-18 (-4)	88268KH	5
3/8 (-6)	3/8-18 (-6)	88269KH	5
	1/2-14 (-8)	88270KH	5
1/2 (-8)	3/8-18 (-6)	27983KH	5
	1/2-14 (-8)	88271KH	5
3/4 (-12)	3/4-14 (-12)	88272KH	2
1 (-16)	1-11-1/2 (-16)	88273KH	2


Male Pipe Swivel – 90° Elbow Hose I.D. x Male NPT



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	1/4-18 (-4)	54651KH	2
3/8 (-6)	1/4-18 (-4)	54652KH	2
	3/8-18 (-6)	54653KH	2
1/2 (-8)	1/2-14 (-8)	54654KH	2


Male Rigid – O-Ring Boss Straight Thread Hose I.D. x Male O-Ring Boss

Includes O-ring



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	88274KH	5
	1/2-20 (-5)	88275KH	5
	9/16-18 (-6)	88276KH	5
3/8 (-6)	9/16-18 (-6)	88277KH	5
	3/4-16 (-8)	88288KH	5
	7/8-14 (-10)	88289KH	5
1/2 (-8)	3/4-16 (-8)	88290KH	2
	7/8-14 (-10)	88291KH	2
	1-1/16-12 (-12)	88292KH	2
5/8 (-10)	7/8-14 (-10)	88294KH	2
	1-1/16-12 (-12)	88295KH	2
3/4 (-12)	7/8-14 (-10)	88297KH	2
	1-1/16-12 (-12)	88298KH	2
	1-5/16-12 (-16)	88299KH	2
1 (-16)	1-5/16-12 (-16)	88300KH	1

Male Swivel – O-Ring Boss Straight Thread Hose I.D. x Male O-Ring Boss



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	7/16-20 (-4)	63300KH	2
3/8 (-6)	9/16-18 (-6)	88405KH	2
	3/4-16 (-8)	88406KH	2
1/2 (-8)	3/4-16 (-8)	88407KH	2
	7/8-14 (-10)	88408KH	2
3/4 (-12)	7/8-14 (-10)	88412KH	1



KURT BRAIDED HOSE FITTINGS




These fittings are designed for crimping Kurt 100R2S and 100R16S hoses



Male Swivel – O-Ring Boss Straight Thread – 90° Elbow


Hose I.D. x Male O-Ring Boss

Includes O-Ring




Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	9/16-18 (-6)	63410KH	2
	9/16-18 (-6)	88413KH	2
3/8 (-6)	3/4-16 (-8)	88414KH	2
	7/8-14 (-10)	88415KH	2
1/2 (-8)	3/4-16 (-8)	88416KH	2
	7/8-14 (-10)	88417KH	2
3/4 (-12)	1-1/16-12 (-12)	88419KH	2

SAE 45° Flare Male Rigid Hose I.D. x Male SAE 45°



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
3/8 (-6)	5/8-18 (-6)	88420KH	2


Male DIN Universal Seat (Light) Hose I.D. x Male DIN



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/4 (-4)	M14 x 1.5	22878KH	2
	M16 x 1.5	22879KH	2
3/8 (-6)	M16 x 1.5	22880KH	2
	M18 x 1.5	22881KH	2

SAE Code 61 Split Flange – Straight Hose I.D. x Flange


SAE Code 61 Flange Kits sold separately



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
3/4 (-12)	1.50 (-12)	63351KH	1
	1.75 (-16)	63352KH	1
1 (-16)	1.75 (-16)	63353KH	1

SAE Code 61 Split Flange – 90° Tube Elbow Hose I.D. x Flange


SAE Code 61 Flange Kits sold separately



Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/2 (-8)	1.19 (-8)	63411KH	2
	1.50 (-12)	63412KH	1
3/4 (-12)	1.75 (-16)	63413KH	1
	1.75 (-16)	63414KH	1
1 (-16)	2.00 (-20)	63415KH	1

SAE Code 61 Split Flange – 45° Tube Elbow Hose I.D. x Flange

SAE Code 61 Flange Kits sold separately

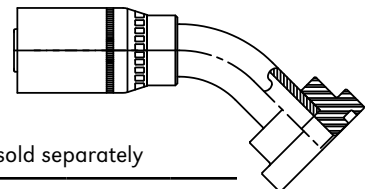

Fitting Dimension A (Hose) (Inches)	Fitting Dimension B (Working End)	Item No.	Pkg. Qty.
1/2 (-8)	1.19 (-8)	63366KH	1
	1.50 (-12)	63367KH	1
3/4 (-12)	1.75 (-16)	63368KH	1

