


Wiggle Wire



Wiggle Wire is used for crease pulling and rocker panel automotive body repair.

1. Weld wire to the dent or crease over a series of points.
2. Connect a hook, slide hammer or other pulling tools to pull dents and creases out of panels.
3. Easy removal – breaks right off.

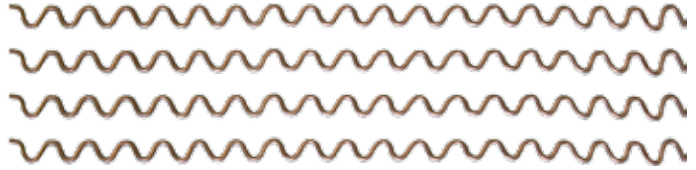

| Description | Dia. (Inches) | Wire Length | Approximate No. Of Pieces Per Lb. | Item No. | Pkg. Qty. |
|-------------|---------------|-------------|-----------------------------------|----------------|-----------|
| Thin | 1/16 (0.062) | 12" to 13" | 60 | 1556087 | 1 Lb. |
| Thick | 3/32 (0.093) | 12" to 13" | 30 | 1556086 | 1 Lb. |

