

# WAXY FILM PROTECTANT



## LU™ 710



For use in medium pressure applications



Protectant Longevity: Heavy 24 months



Minimum - Maximum operational temperature range: Low -20 °F (-29 °C) • High 300 °F (149 °C)



Features Spray Anyway® Nozzle



HMIS Hazard Rating: Health (2) • Flammability (4) • Reactivity (0)

- Penetrates
- Demoisturizes
- Waxy film prevents rust
- Protects outdoors long-term



PRESERVE. PROTECT. PREVENT.™

Sprayon® LU™710 Waxy Film Protectant is a high-solids, waxy-film, corrosion preventive compound suitable for a wide range of applications. This formula provides long term protection of all metal surfaces, including vehicle underbody and enclosed, boxed, seam, joint and other crevice locations susceptible to corrosion. This pliable, firm coating has a polar attraction to metal surfaces and does not crack, age or harden. The dried coating is not flammable and protects electrical connections and wiring. It is not harmful to materials that are part of vehicle construction or paints, and prevents galvanic corrosion. The film is a lubricant for joints, guarding against fretting corrosion. This heavy duty water displacing film allows greater protection for machinery or parts stored outdoors, especially in salt water or a high humidity atmosphere. Easily removed with petroleum solvents, kerosene or perchloroethylene.

## LUBRICANTS

### USES

- Automotive parts
- Threads
- Assemblies
- Hinges
- Aircraft parts
- Gears
- Fabricated parts
- Molds
- Electrical equipment
- Armatures
- Generators
- Ignitions
- Marine engines
- Dies
- Engines and parts
- Castings
- Machine tools
- Locks
- Tools
- Weapons



LU710

### APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale. Product should be sprayed in a well ventilated area. Sprays best at room temperature (70°F.) Shake well before using. Spray at a distance of 10" to 14" from surface.

### PERFORMANCE

**DIELECTRIC STRENGTH:** 2,000 volts

**PLASTIC SAFE:** Yes

**TEMPERATURE RANGE:**

**LOW:** -0°F

**HIGH:** 300°F

**LOAD CAPACITY:** Medium pressure

**GOVERNMENT SPECIFICATIONS:**

Post office spec. VB-65-1

**SALT SPRAY (ASTM B-117):** 1,000 hours

**HUMIDITY CABINET TEST (ASTM D-1748):**

1,500 hrs. @ 120°F - pass

- Penetrant
- Rust Inhibitor
- Equipped with an extension tube for hard-to-reach areas

### PROPERTIES

**APPEARANCE:** Amber

**ODOR:** Mild petroleum solvent

**PROPELLANT:** Hydrocarbon

**WT./GAL.:** 6.03

**SPECIFIC GRAVITY:** 0.73

**PAINTABLE:** No

**% VOC AEROSOL:** 55.05%

**V.O.C. COMPLIANT CALIFORNIA:** Yes

**V.O.C. COMPLIANT OTC STATES:** Yes

**FLAMMABLE:** Yes

**FLASH POINT:** <0°F

**HAZARD RATING:** 2,4,0

**SHELF LIFE:** 3 years from date of manufacture

### RESOURCES

**MSDS/EDS/PRODUCT DATA SHEETS:**

sprayon.com

**CUSTOMER SERVICE:**

1-800-777-2966

**TECHNICAL INFORMATION:**

1-800-251-2486

### PACKAGING

**Stock #:** S00710

**UPC Code:** 0-75577-90710-6

**Fill Wt.:** 12 oz.


**Per Case:** 12

**Carton Dimensions:**

L 11.13" x W 8.44" x H 8.38"

### SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

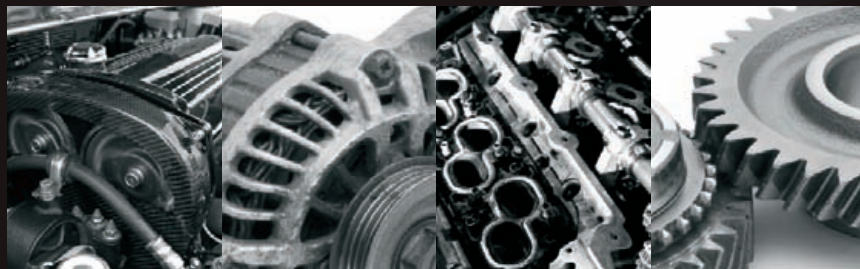

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

**Lawson Products, Inc.**

To order these and other products, contact us:

866-529-7664 lawsonproducts.com

PRESERVE. PROTECT. PREVENT.



**Sprayon® Products**

101 Prospect Ave. NW

Cleveland, OH 44115

Sprayon.com

1-800-777-2966

310-PDS-LU710