

## **REFERENCE CHARTS**



Automotive

Chemicals


Cutting Tools/ Abrasives Electrical


**Fasteners** 

Fluid Power

Safety/ Material Handling Shop Supplies/ Hand Tools Welding

## **Countr-Bor and Socket Head CapScrew Dimensions**

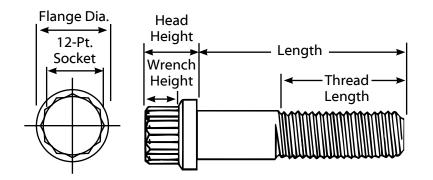

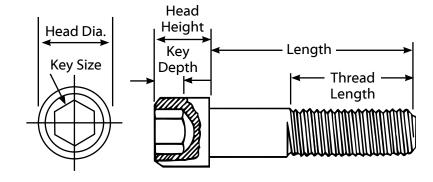

## **Countr-Bor**

Nominal Dia. (Inches)	Flange Dia. (Inches)	12-Point Socket Dia. (Inches)	Head Height (Inches)	Wrench Height (Inches)	Thread Length (Inches)
1/4	.375	1/4	.260	.150	1
5/16	.469	5/16	.312	.180	1-1/8
3/8	.562	3/8	.375	.210	1-1/4
7/16	.656	7/16	.438	.260	1-3/8
1/2	.750	1/2	.500	.290	1-1/2
5/8	.938	5/8	.625	.360	1-3/4
3/4	1.125	3/4	.750	.440	2
7/8	1.312	7/8	.875	.510	2-1/4
1	1.500	1	1.000	.600	2-1/2

## **Socket Head**

Nominal Dia. (Inches)	Head Dia. (Inches)	Key Size (Inches)	Head Height (Inches)	Key Depth (Inches)
1/4	.375	3/16	.250	.120
5/16	.469	1/4	.312	.151
3/8	.562	5/16	.375	.182
7/16	.656	3/8	.438	.213
1/2	.750	3/8	.500	.245
5/8	.938	1/2	.625	.307
3/4	1.125	5/8	.750	.370
7/8	1.312	3/4	.875	.432
1	1.500	3/4	1.000	.495

REF-FS02 REV. 6/11